

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference PHN 17.522W0	FOR FURTHER ACTION see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. PCT/EP 00/ 05891	International filing date (day/month/year) 23/06/2000	(Earliest) Priority Date (day/month/year) 29/06/1999
Applicant KONINKLIJKE PHILIPS ELECTRONICS N.V.		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.

☒ as suggested by the applicant.

☐ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

5c

☐ None of the figures.

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 January 2001 (04.01.2001)

PCT

(10) International Publication Number
WO 01/01416 A1

(51) International Patent Classification⁷: **G11B 27/034**,
27/30, 27/32, 20/12, H04N 5/85 // 5/775, 9/804, G11B
7/00

(21) International Application Number: PCT/EP00/05891

(22) International Filing Date: 23 June 2000 (23.06.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
99202106.3 29 June 1999 (29.06.1999) EP

(71) Applicant (for all designated States except US): **KONIN-
KLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **DE HAAN, Wiebe**
[NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven
(NL).

(74) Agent: **DE VRIES, Jan**; Internationaal Octrooibureau
B.V., Prof Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE,
DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU,
ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS,
LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ,
PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT,
TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

- With international search report.
- Before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments.

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: DATA ALLOCATION IN DVD RECORDING

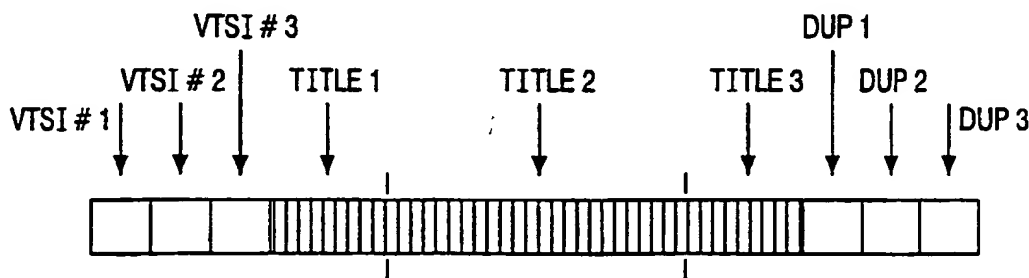

(57) Abstract: A method of recording an encoded bit stream, said encoded bit stream representing a plurality of video objects comprising a sequence of cells together constituting a part of an MPEG2 Program Stream, on a disc like record carrier, such as an optical disc. The method comprises recording multiple series of contiguously arranged video objects constituting multiple video object sets on said disc with corresponding multiple management information comprising attribute information of the corresponding video object set. The management information constituting with a video object set a playable video title. The multiple video object sets are combined into a single combined video object set and the multiple management information is preceding said combined video object set.



WO 01/01416 A1

Data allocation in DVD recording.

The invention relates to a method for recording encoded information signals as recited in the preamble of claim 1 on a disc like record carrier, such as an optically readable disc. The invention further relates to a recording apparatus for performing the method.

5

The DVD-Video format for optically readable discs is defined in the DVD Specifications for Read-Only Disc, part 3: Video Specifications (version 1.0, August 1996). Relevant parts therefrom are being disclosed in for instance European Patent Application EP 724 264 and US Patent 5 784 528, respectively document D1 and D2 in the list of referred documents that can be found at the end of this description. Both documents are incorporated by reference herein.

The DVD-Video format as defined in the above mentioned Specifications for READ-Only Disc and disclosed in D1 and D2 was created for storing movies and other video content on read-only DVD media. Some of the features of the DVD-Video format make it less suitable for real-time recording applications.

However, it is desirable to create and record video streams and associated data structures on rewritable media in real time which are should preferably be almost identical to the structures defined in the DVD-Video format. Such rewritable discs should be play back compatible with the majority of the installed base of consumer DVD-Video players. The method according to the invention describes a novel and inventive format for DVD-Video compatible real-time recording of video streams, referred to hereinafter to as Real Time DVD Video Recording or shortly DVD-Video Recording. The format defined is intended for home video recording on an optical medium which is playback compatible with DVD-Video players.

The above-mentioned DVD-Video format demands that data for a Video Title Set (VTS) be allocated contiguously. This implies that Titles cannot be fragmented, except for interleaving. A Title in this respect is defined to be a user accessible unit in Title Search Pointer table of the DVD-Video format. This requirement implies that a user should see a

disc as a linear recording space equivalent to a tape where Titles are presented to user in order of recording.

However, this gives all kinds of problems when part of the data is overwritten with new recordings such as occurs with adding, appending, overwriting or deleting a Title.

5 A possible solution would be to organize all titles in one Video Title Set, preceded by one Video Title Set Information area (VTSI) and a corresponding Video Manager General Information area (VMGI). However, this has the disadvantage that no longer can be distinguished between different parameter sets for each Title. Such as for example the video parameters picture resolution, frame rate, aspect ratio and bit rate.

10 In consequence, amongst other things, it is an object of the invention to obviate the above-mentioned disadvantages. According to one of its aspects a method of recording to the invention is characterized as recited in the characterizing part of claim 1.

15 Now each playable title may have its own management information. Locating the management information in advance of all video objects has the advantage that the video object sets may be regarded as one, composite video object set. This leads to a simplified addressing.

20 Further advantageous aspects of the invention are recited in other, dependent claims.

25 These and further aspects and advantages of the invention will be apparent from and elucidated in more detail hereinafter with reference to the disclosure of preferred embodiments, in particular with reference to the appended figures in which,

Fig. 1 illustrates a linear tape model in view of some typical video recording actions;

Fig. 2 illustrates the structure of the video area on a disc according to the DVD Video format; while

30 Fig. 3 shows in more detail the arrangement of a Video Object Set (VOBs) of Fig. 1 in Video Objects (VOB) and Cells;

Fig. 4 shows a possible arrangement of all Titles in one Video Title Set and

Fig. 5 shows an arrangement of multiple Video Title Sets according to an embodiment of the invention;

Fig. 6 shows a recording apparatus according to a first embodiment of the invention, the respective units therefrom being illustrated in more detail in the following figures of which

Fig. 7 shows an A/V input unit;

Fig. 8 shows a CODEC unit;

Fig. 9 shows an A/V output unit;

Fig. 10 shows a drive unit, and

Fig. 11 shows a system control unit.

Fig. 1 illustrates the concept of a linear tape model in view of some typical recording actions. Fig. 1A illustrates a recording of a first Title 1 in a linear address space of a DVD disk with a remaining free space 2. According to the DVD-Video format, the data is allocated contiguously. Fig. 1B illustrates adding a Title 2 after the first Title 1. Fig. 1C shows appending to the existing Title 1, the append part indicated by the arrow. Part of the Title 2 of Fig. 1C is overwritten. Fig. 1D illustrates partly overwriting the Title 2. Fig. 1E shows deleting Title 3 of Fig. 1D.

Fig. 2 illustrates the DVD video area according to the DVD Video format. It is noted a Lead_in zone, a Lead_out zone and a file system, although present, are not depicted in this figure. The DVD Video area starts with a Video Manager Area (VMG) comprising a Video Manager General Information (VGMI) area, an Video Object Set (VOBS) area and a Duplicate (DUP) area containing a copy of the Video Manager General Information (VGMI) area. A Video Object Set (VOBS) is a collection of contiguously recorded VOBs as will be illustrated hereinafter with reference to Fig. 4.

The Video Manager (VMG) contains information about the recorded video data and a Title Menu. This is a menu that gives the user access to Play Lists and optionally to Full Titles.

A Play List is a Title representing a play back sequence of Cells from one Recording. A Cell is a sequence of one or more Video Object Units (VOBU). The first VOB of a Cell shall contain video data. A Cell is the basic presentation unit for the Program Chains (PGC), which is a playback sequence of Cells for the presentation of a Menu or a Title.

A full Title represents one Recording. When a Full Title is played, all complete Cells contained in the Recording are played in the order of data allocation in the Video Object Set for Titles in a Video Title Set. (VTSTT_VOBS).

A Recording is a contiguous piece of the Video Object Set for Titles in a Video Title Set (VTSTT_VOBS). A Video Object (VOB) is (a part of) a sequence of contiguously recorded Cells, together constituting (a part of) an MPEG-2 Program Stream containing

5 MPEG-2 Program Stream packs such as defined in ISO/IEC 13818-1 related to MPEG-2 systems, document D3 in the list of referred documents that can be found at the end of this description.

The Title Search Pointer Table is one of the elements of the Video Manager. This table lists all available Play Lists and Full Titles on the disc. It is a starting point for
10 finding the data that is relevant for playing back a Title.

Free Space is a recording which is represented by a Free Space Title in the Title Search Pointer Table. If the last Recording is free space, it is not represented in this table. A Free Space Title is a Full Title or Play List Title which cannot be played back as the related Program Chain Information contains a pre-command to prevent this. Time_Play(),
15 Time_Search(), PTT_Play() and PTT_Search() for a Free Space Title are blocked. The Cell information in the Program Chain of a Free Space Title may not be reliable.

After the Video Manager (VMG) several Video Title Sets (VTS#1, VTS#2 ..) may follow, each Video Title Set (VTS) preceded by Video Title Set Information (VTSI) containing information with respect to the corresponding Video Title Set (VTS) such as
20 audio and video parameters. Following the Video Title Set Information (VTSI) are corresponding Video Object Set (VOBS) containing MPEG-2 video for respectively Menus and Titles. Each Video Title Set close with a Duplicate area (DUP) containing a copy of the Video Title Set Information (VTSI).

Fig. 3 illustrates in more detail the arrangement of a Video Object Set (VOBs)
25 of Fig. 2 in contiguously recorded Video Objects (VOB#1, VOB#2,...) and Cells (C_IDN=1, C_IDN=2,...). VOBs which are used for the menus are stored in the Video Manager VOBS (VMGM_VOBS). VOBs which are used for the Titles are stored in the VTS Title VOBS (VTSTT_VOBS).

Fig. 4 shows a possible arrangement of all Titles in one Video Title Set.
30 Following the Video Manager (VMG) area, is only one Video Title Set preceded by one Video Title Set Information (VTSI) area and a corresponding Duplicate (DUP) area. The Video Title Set (VTS) contains in this example two Titles (Title1 and Title 2). The corresponding Presentation Control Information (PCI) and Data Search Information (DSI), not shown in Fig 4, is dispersed in corresponding Navigation Packs (NV_PCK) in each

Video Object Unit (VOBU) of the Video Object Set VOBS. According to the DVD Video format, a Video Title Set (VTS) has a separate reference point in the Navigation Pack (NV_PCK). Each Navigation Pack (NV_PCK) has a Logical Block Number (NV_PCK_LBN) that is relative to this reference point (VOBS Offset in NV-PCK).

5 When the real time data of the Video Object Set (VOBS) is overwritten by a New Title, the Video Title Set Information (VTSI) and the Video Manager Information (VMGI) are updated.

 However, the embodiment according to Fig. 4, is limited in that the Video Title Set (VTS) may only contain one parameter set for video and audio. Such as for example
10 parameters related to aspect ratio, Long Play mode versus Normal Play mode, picture size and Video Coding Mode (MPEG1 or MPEG2) and so on. An embodiment according to the invention that overcomes this disadvantage will be disclosed with reference to Fig. 5

 Fig. 5 shows an arrangement of multiple Video Title Sets according to an embodiment of the invention. This arrangement allows multiple interleaved Video Title Sets
15 (VTS#1, VTS#2...). The real time data of the Video Title Sets (TITLE1, TITLE2, TITLE3) is arranged consecutively while the corresponding Video Title Set Information (VTSI#1, VTSI#2, VTSI#3) is arranged separately. When real time data is overwritten, this info structures are adapted such that only references to the remaining data structures are made. Players do not notice that the real time data of various Video Title Sets is arranged in an
20 interleaved manner. With reference to Fig.5A, which shows only one Title (TITLE1), Fig. 5B shows an additional Title (TITLE2) and Fig.5C two additional Titles (TITLE2 and TITLE3). It is noted that each Navigation Pack (NV-PCK) has a Relative Block Number (NV_PCK_LBN) that is relative to the first sector containing real time data of any Video Title Set (VTS). This is regarded as the common reference point for all real time data.

25 The Video Title Set Information (VTSI#1, VTSI#2, VTSI#3) files are located in a separate area on the disc, preferably in front of any real time data structure. This is also done for the corresponding Duplicate files (DUP1, DUP2, DUP3). Each Video Title Set is allowed to have its own video and audio parameters such as defined in the corresponding Video Title Set Information (VTSI)

30 Fig. 6 shows a recording apparatus according to a first embodiment of the invention. The recording apparatus is composed of several units. One unit is the A/V input unit 1. The A/V input unit 1 receives image and sound signals at antenna input terminal 2 and an external sound/image input terminal 3. The antenna input terminal 2 is adapted to receive broadcasted modulated A/V signals transmitted by either satellite, terrestrial or cable source.

The external sound/image input terminal 3 is adapted to receive a non modulated audio signal or a non-modulated video signals generated directly by respectively an audio or a video source.

Fig. 7 illustrates the A/V input unit 1 in more detail. A tuner 5, which is
5 connected to the antenna input terminal 2, demodulates the modulated A/V antenna signals and outputs the demodulated signals to a suitable A/V demultiplexing unit 6 for separating audio signals from video signals. An audio A/D converter unit 7 outputs a digital audio signal A and a NTSC/PAL/SECAM decoding unit 8, comprising a video A/D converter, outputs a digital video signal V. These signals A and V are outputted to an encoding/decoding
10 unit 9, which is illustrated in more detail in Fig. 8. The encoding/decoding unit 9 compresses and encodes the signals A and V, respectively by an audio encoder 10 and a video encoder 11, converts them to a multiplexed and compressed stream conforming to Video Recording specifications, employing a multiplexer 12. To this purposes the audio encoder 10 and video
15 encoder 11 are adapted to perform source compression according to a specific standard for compression, such as for example MPEG-2 for audio and video.

The compressed and multiplexed stream is submitted via a track buffer 13, which absorbs rate fluctuations stemming from intermittent recording and data reproduction from a disc, to a drive unit 14. The encoding/and decoding unit 9 also expands a compressed
20 stream read from a recording medium by the drive unit 14 and outputs separately an audio signal A and a video signal V to the A/V output unit 15. To this purpose, the encoding/decoding unit 9 comprises a suitable A/V decoder 16 for decoding the compressed audio and video source signals.

The A/V output unit 15, which is illustrated in more detail in Fig. 9, comprises an audio D/A converter 17 for outputting sound signals to an external sound output terminal
25 18. The A/V output unit 15 further comprises a video encoder - D/A converter unit 19 for outputting video signals to an external image output terminal 20.

Fig. 10 illustrates the drive unit 14 in more detail. This unit 14 receives the compressed stream generated by the encoding/decoding unit 9, and adds an error-correction code by a suitable error correction processing unit 21 to the stream. Next a channel
30 modulation/demodulation unit 22 converts the stream with error-correction code to channel bits adapted for recording on a recording medium 23. In case of a DVD-disc the EFM+ modulation scheme is being applied. Recording and reading in case of a recording medium 23 of the optical type, is performed by a laser comprised in an optical head unit 25. A laser power control unit 24 is controlling the laser. Reflected signals from the recording medium

23 are being converted by an amplifier and waveform equalizer circuit 26 into two-value signals. The resultant compressed stream is further demodulated by the modulating/demodulation unit 22, error corrected by the error correction processing unit 21 and outputted to the encoding/decoding unit 9 via track buffer 13.

5 A servo circuit 27, connected to the amplifier and waveform equalizer circuit 26, controls the positioning of the optical head unit 25 relative to the recording medium 23 and the rotational velocity of the recording medium 23 by controlling rotational driving means 28.

10 A system control unit 29, as shown in Fig. 11, controls each block and perform file control, control information management and track buffer control. To this purpose a system control processing unit 30 is provided that is being connected to memory means 31 loaded with a suitable operation system. Operator input means 32 and operator output means 33 are connected to the memory means 31. The operator input means 32 comprising for instance keying means and the operator output means comprising display
15 means.

Although the invention has been described with reference to preferred embodiments thereof, it is to be understood that these are not limitative examples. Thus, various modifications thereof may become apparent to those skilled in the art, without departing from the scope of the invention, as defined by the claims. The invention can be
20 implemented by means of both hardware and software, and that several "means" may be represented by the same item of hardware. Further, the invention lies in each and every novel feature or combination of features. It is also remarked that the word 'comprising' does not exclude the presence of other elements or steps than those listed in a claim. Any reference signs do not limit the scope of the claims.

LIST OF REFERRED DOCUMENTS

(D1) European Patent Application EP 724 264

(D2) US Patent 5 784 528

- 5 (D3) ISO/IEC 13818-1 : 1995 Information Technology – Generic Coding of moving pictures
and associated audio information : Part 1 : Systems (MPEG2-systems)

CLAIMS:

1. A method of recording an encoded bit stream, said encoded bit stream representing a plurality of video objects comprising a sequence of cells together constituting a part of an MPEG2 Program Stream, on a disc like record carrier, such as an optical disc, said method comprising:
 - 5 recording a series of contiguously arranged video objects as a video object set on said disc,
 - recording management information comprising attribute information of the recorded video object set, wherein
 - said management information precedes said video object set and constitutes
 - 10 therewith a playable video title,
 - characterized by,
 - recording at least a second series of contiguously arranged video objects constituting a second video object set and corresponding second management information on said disc, wherein
 - 15 the at least two video object sets are combined into a single video object set and the first and the at least second management information precedes said combined video object set.
2. A method according to claim 1, wherein each video object contains navigation
- 20 information employing a common reference address.
3. A method according to claim 2, wherein said reference address is at the beginning of the first series of video objects following the management information.
- 25 4. A method according to claim 3, wherein the attribute information comprises picture resolution and/or video coding mode of the video object set.
5. A method according to claim 4, wherein a playable video title, a video object set and the management information corresponds respectively to a Video Title Set (VTS), a

Video Title Set Video Object Set (VTSTT-VOBS) and the Video Title Set Information (VTSI) of the DVD-Read Only Video Specification.

6. A method according to claim 5, wherein the navigation information
5 corresponds to a Navigation Pack (NV-PCK) of the DVD-Read Only Video Specification and the common reference address corresponds to the first logical block number of the first Video Object Set of the series of Video Objects Sets.

7. A recording apparatus for recording an encoded bit stream, representing a
10 plurality of video objects comprising a sequence of cells together constituting a part of an MPEG2 Program Stream, on a disc like record carrier, such as an optical disc, the recording apparatus comprises

recording means for recording a series of contiguously arranged video objects
as a video object set on said disc and for recording management information comprising
15 attribute information of the recorded video object set,

wherein said management information precedes said video object set and
constitutes therewith a playable video title,

characterized in that, the recording apparatus comprises

system control means adapted to control recording of at least a second series
20 of contiguously arranged video objects constituting a second video object set and
corresponding second management information on said disc, wherein

the at least two video object sets are combined into a single video object set
and the first and the at least second management information precedes said combined video
object set.

8. A recording apparatus according to claim 7, characterized in that,
the system control means are adapted to include in each video object
navigation information employing a common reference address.

9. A recording apparatus according to claim 8, wherein said common reference
30 address is at the beginning of the first series of video objects following the management
information.

10. A recording apparatus according to claim 9, characterized in that,

the system control means are adapted to include picture resolution and/or a video coding mode of the video object set as attribute information.

11. A recording apparatus according to claim 10, wherein a playable video title, a video object set and the management information corresponds respectively to a Video Title Set (VTS), a Video Title Set Video Object Set (VTSTT-VOBS) and the Video Title Set Information (VTSI) of the DVD-Read Only Video Specification.

12. A recording apparatus according to claim 11, wherein the navigation information corresponds to a Navigation Pack (NV-PCK) of the DVD-Read Only Video Specification and the common reference address corresponds to the first logical block number of the first Video Object Set of the series of Video Objects Sets.

1/6




FIG. 1A



FIG. 1B




FIG. 1C




FIG. 1D




FIG. 1E

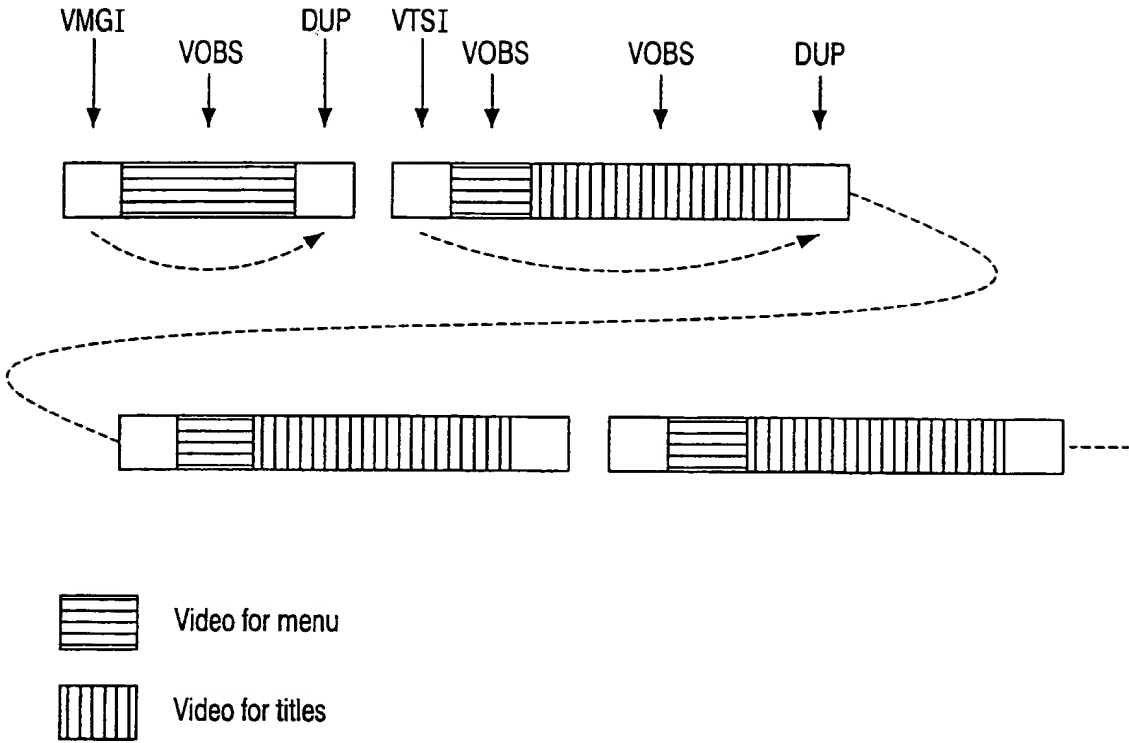


FIG. 2

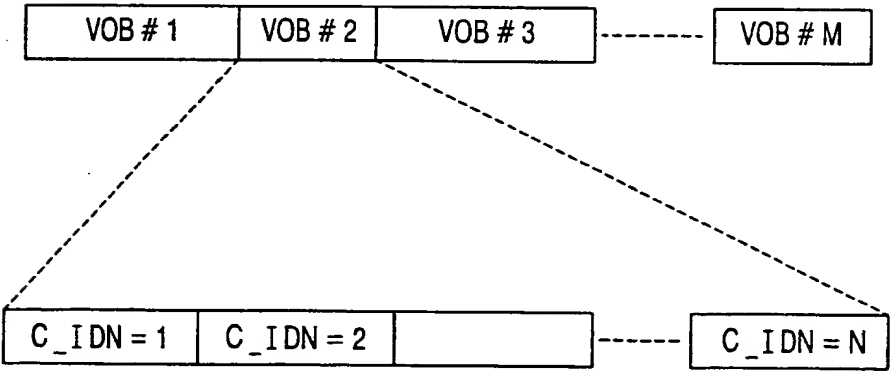


FIG. 3

3/6

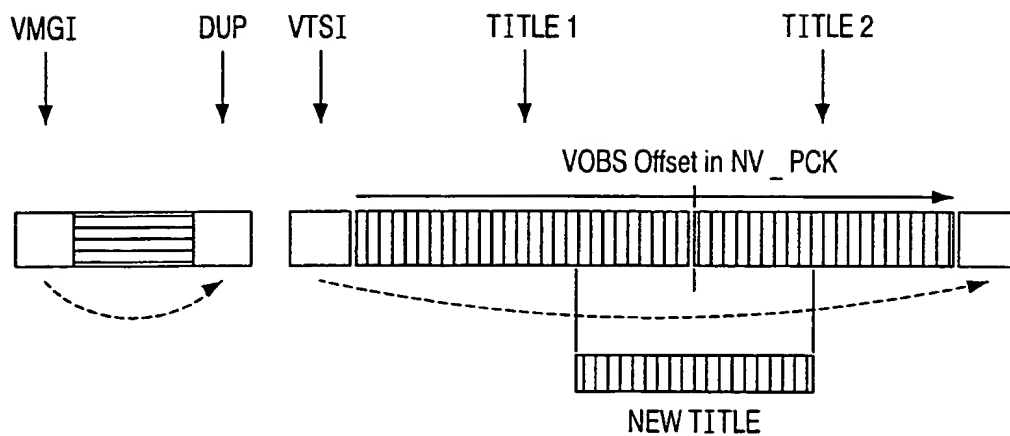


FIG. 4



FIG. 5A

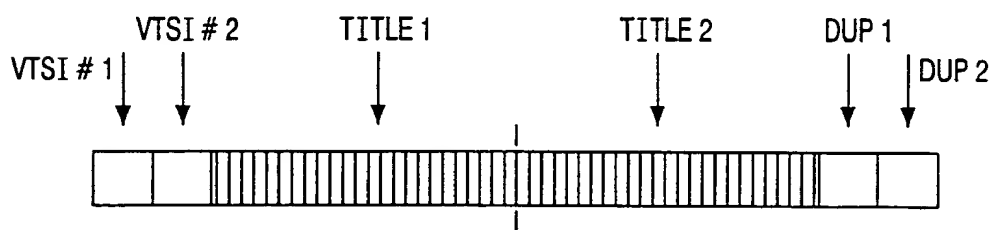


FIG. 5B

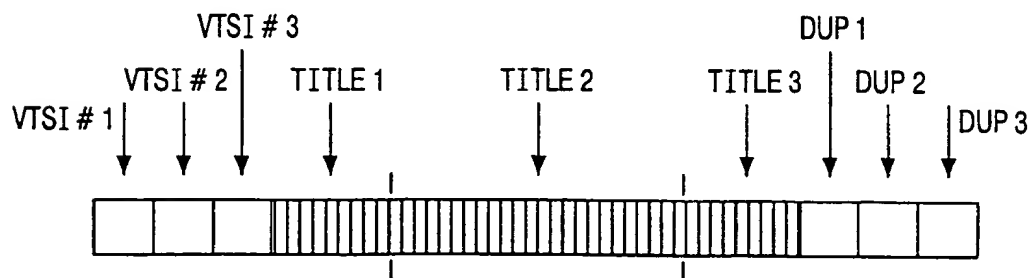


FIG. 5C

4/6

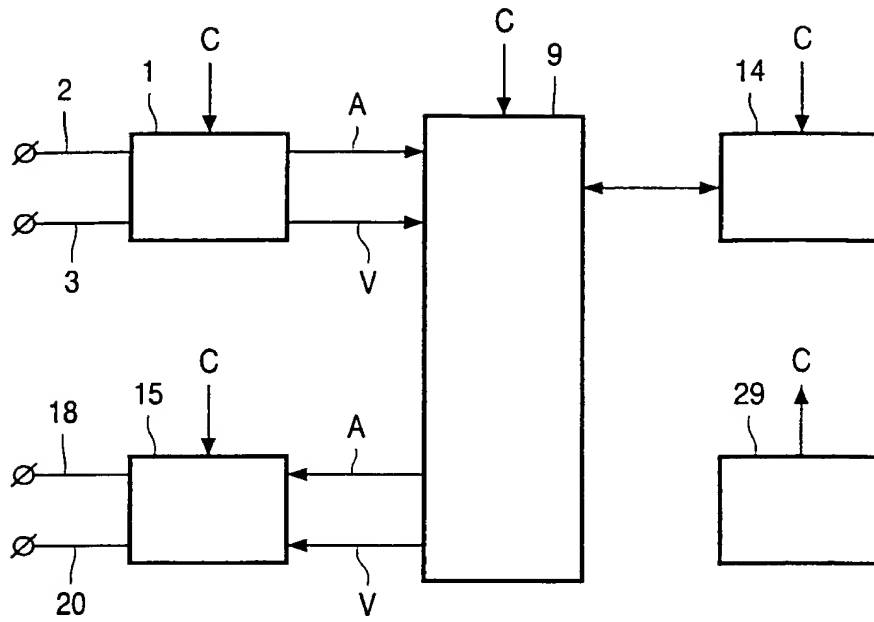


FIG. 6

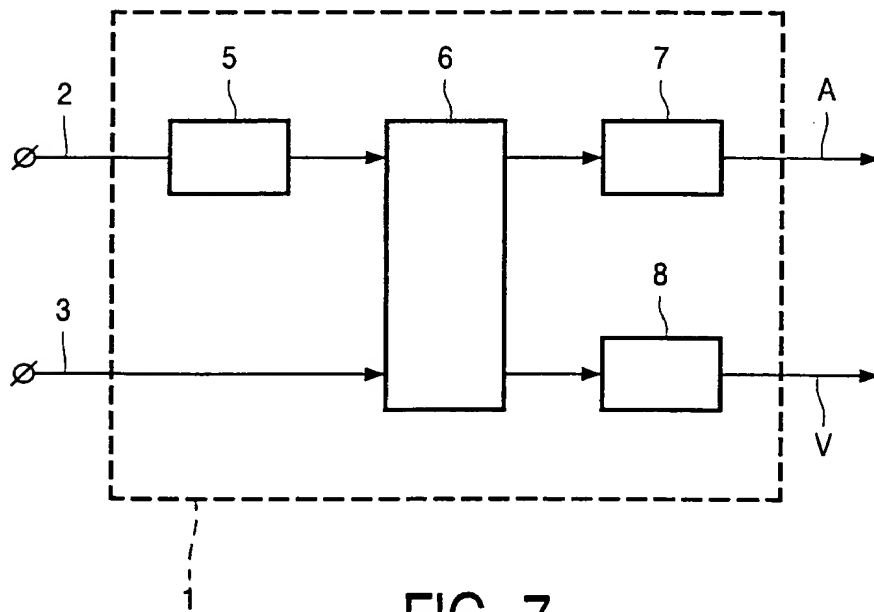


FIG. 7

5/6

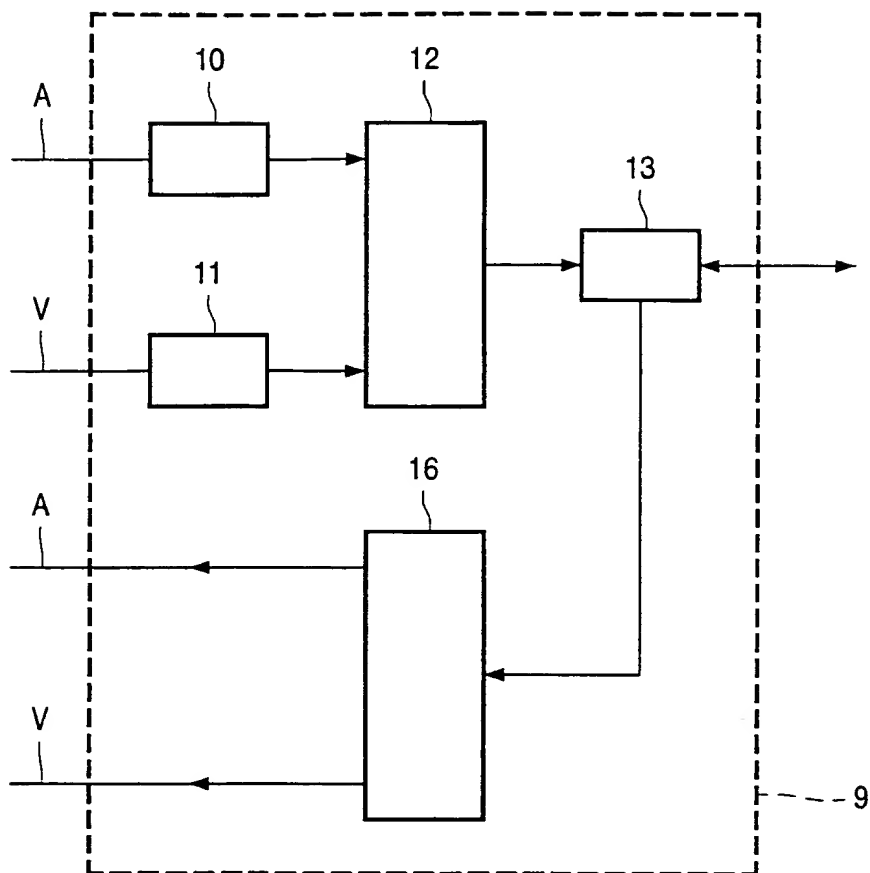


FIG. 8

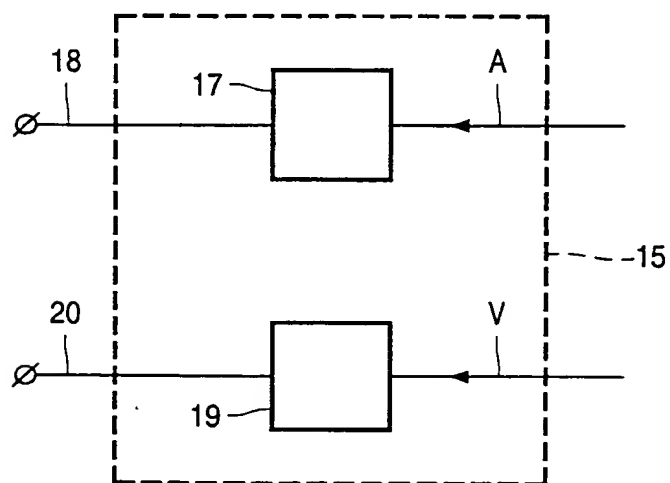


FIG. 9

6/6

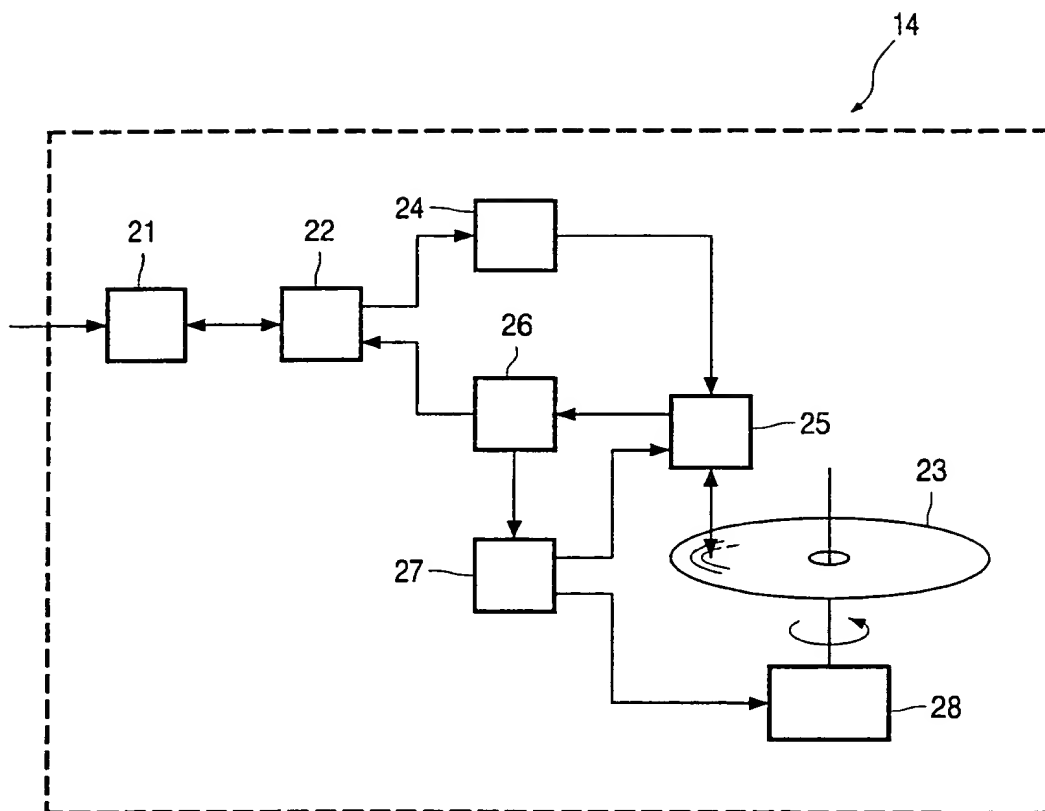


FIG. 10

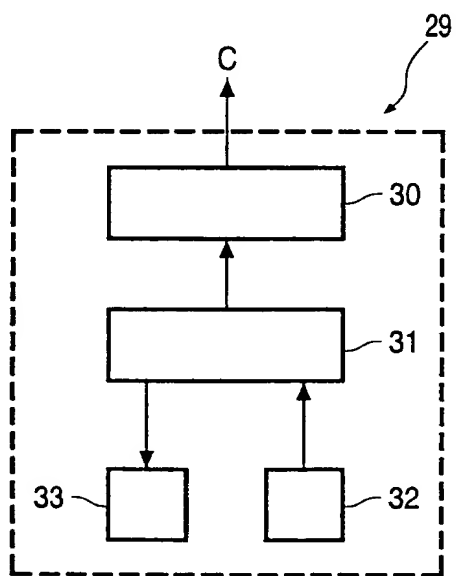


FIG. 11

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 00/05891

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G11B27/034 G11B27/30 G11B27/32 G11B20/12 H04N5/85
//H04N5/775, H04N9/804, G11B7/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G11B H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
E	EP 1 043 726 A (PIONEER ELECTRONIC CORP) 11 October 2000 (2000-10-11) the whole document	1,7
P, X	----- PATENT ABSTRACTS OF JAPAN vol. 2000, no. 01, 31 January 2000 (2000-01-31) & JP 11 273262 A (PIONEER ELECTRON CORP), 8 October 1999 (1999-10-08) abstract	1,7
P, A	& JP 11 273262 A: paragraph '0006!-paragraph '0022!; figure 1-5 ----- -/--	4,9

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

20 November 2000

Date of mailing of the international search report

27/11/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Daalmans, F

INTERNATIONAL SEARCH REPORT

Intern. Application No

PCT/EP 00/05891

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 01, 31 January 2000 (2000-01-31) & JP 11 273314 A (PIONEER ELECTRON CORP), 8 October 1999 (1999-10-08) abstract & JP 11 273314 A: figure 4 and 5	1,7
P,A	---	4,9
P,A	EP 0 929 072 A (TOKYO SHIBAURA ELECTRIC CO) 14 July 1999 (1999-07-14) column 60, line 9 -column 87, line 6 ---	1-12
P,A	WO 00 30112 A (KONINKL PHILIPS ELECTRONICS NV) 25 May 2000 (2000-05-25) the whole document	1-12
L	the same applicant	
P,A	---	
P,A	EP 0 942 426 A (NIPPON COLUMBIA) 15 September 1999 (1999-09-15) the whole document	1,7
A	---	
A	WO 98 44508 A (DAE WOO ELECTRONICS CO LTD) 8 October 1998 (1998-10-08) the whole document	1,7
A	---	
A	EP 0 903 744 A (MATSUSHITA ELECTRIC INDUSTRIAL CO.,LTD) 24 March 1999 (1999-03-24) column 70, line 26 -column 122, line 17 ---	1-12
A	---	
A	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 11, 30 September 1999 (1999-09-30) & JP 11 162119 A (TOSHIBA CORP;TOSHIBA COMPUT ENG CORP), 18 June 1999 (1999-06-18) abstract & JP 11 162119 A: figure 11 -----	1,7

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 00/05891

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1043726	A	11-10-2000	NONE	
JP 11273262	A	08-10-1999	NONE	
JP 11273314	A	08-10-1999	NONE	
EP 0929072	A	14-07-1999	JP 11176096 A CN 1219727 A JP 2000082276 A	02-07-1999 16-06-1999 21-03-2000
WO 0030112	A	25-05-2000	NONE	
EP 0942426	A	15-09-1999	JP 11232792 A	27-08-1999
WO 9844508	A	08-10-1998	US 5914917 A	22-06-1999
EP 0903744	A	24-03-1999	EP 1020862 A WO 9914935 A JP 3050311 B JP 11187354 A	19-07-2000 25-03-1999 12-06-2000 09-07-1999
JP 11162119	A	18-06-1999	NONE	